

LOAD BANK KPLB-4375



KEYPOWER LOAD BANK:


- * Frequency: 50/60 Hz;
- * Voltage range: AC 110-690V;
- * Duty: Continuous;
- * Cooling system: Industrial grade axle fans;
- * Discharged air direction: horizontal for 100 kw, vertical for larger models;
- * Control power phase: Single-phase, two-wire for 500 kw and below; three-phase, four-wire for larger models.

GENERAL SPECIFICATIONS

	Model	KPLB-4375
	Capacity	4375KVA / 3500kW
	Type of load	Resistive & inductive load
	Power factor	0.8 / 1.0
	Duty cycle	Continuous
	Cooling system	Industrial grade axial fan
	Cooling mode	Forced air-cooled
	Airflow	Vertical discharge
	Phase	Available at both single and three phase
	Rated testing voltage	3P3W 110 - 690V
	Rated frequency	50Hz / 60Hz
	Number of fans	10
	Control power input voltage	3P4W 220 - 480V



Dimension and Weight

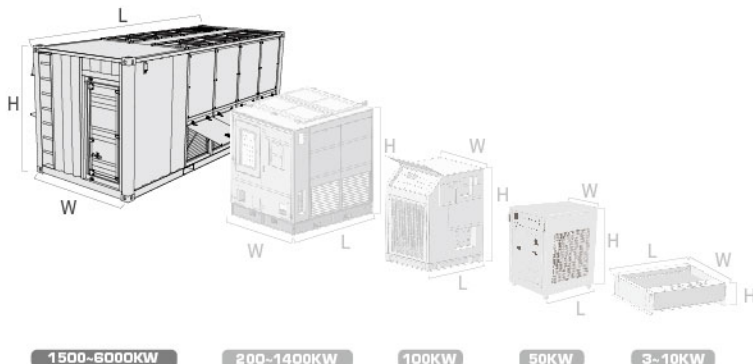

DIMENSION		KPLB-4375	
	Length (L)	mm	12192
	Width (W)	mm	2438
	Height (H)	mm	2896
	Weight	kg	23000

KEYPOWER has the right to modify any feature without prior notice. Weights and dimensions based on standard products. Illustrations may include optional equipment. Technical data described in this catalogue correspond to the available information at the moment of printing. The illustrations and images are indicative and may not coincide in their entirety with the product. Industrial design under patent.

Technical Specifications

PERFORMANCE PARAMETER	
Ambient Temperature	-10°C ~ +55°C
Relative Humidity	≤98% ventilated environment without explosive or corrosive dust
Altitude	≤3000m above sea level
Wire Connection	Socket / Terminal
Load Tolerance (each step)	±5%
Load Tolerance (overall)	±3%
Enclosure	ISO 40HC Container
Parameter measuring accuracy grade	0.5
Noise level	86 dBA @ 1m
Enclosure protection class	IP 54
Forklift handling	No

CONTROL PANEL	
Control mode (Standard)	Local manual control
Control mode (Optional)	Intelligent / remote control
Remote control distance	≤100 m
Load step	10kW*4, 20kW*3, 50kW*2, 100kW*9, 200kW*12 / 8kvar*4, 15kvar*3, 38kvar*2, 75kvar*9, 150kvar*12 (non-intelligent type) 10kW*13, 20kW*6, 50kW*7, 100kW*7, 200kW*11 / 8kvar*13, 15kvar*6, 38kvar*7, 75kvar*7, 150kvar*11 (intelligent type)
Load bank protections	Fan failure alarm/Overload alarm/ Overvoltage alarm/Overheating alarm/ Low airflow alarm/Maintenance door open alarm/Control power failure/ Fault reset
Multi functions display	voltage, current, load power, reactive power, apparent power, power factor, frequency etc.
One-step load/unload	Yes
Emergency stop	Yes
Phase sequence indicator	Yes

Optional Items for Load Bank:



- Capacitive/Inductive/Resistive load bank with different power factor
- Intelligent control
- Laptop for remote control
- Generator tester
- Multi-voltage
- Water-proof cover for air outlet (200-1400KW)
- Air deflecting duct for containerized load bank
- Space heater
- Cable connector
- Galvanized sheet canopy
- Wheels for < 500KW load bank
- Trailer

RESISTOR FEATURES		304 STAINLESS STEEL RESISTORS
Material	Stainless steel	
Cooling mode	Forced air cooling	
Temperature resistance	500 ~ 600°C	
Load Tolerance	±5%	
Warranty	3 years with unlimited hours	

INDUCTOR FEATURES		INDUCTIVE TYPE
Insulation level	Class H	
Operating temperature	-25 ~ 60°C	
Flame retardant rating	UL94 - V0	
Surface treatment	Conformal coating	
Fastener treatment	Hot-dip galvanized	
Overall treatment	Vacuum impregnation varnish	

Generator Tester Function


GENERATOR TESTER




TEST REPORT

Test report of generator set's steady performance									
Source: 0000000000		Model specification		Date of test: 2012-11-10		Serial No: 000000		Page No: 1/2	
1. Set type	1. Voltage	2. Set type	3. Power factor	4. Set type	5. Date of production	6. Set type	7. Date of production	8. Set type	9. Date of production
Rated frequency	50Hz	Rated power	1000kVA	Rated current	1000A	Rated voltage	400V	Rated frequency	50Hz
Generator type	AVR type	Generator type	AVR type	Generator type	AVR type	Generator type	AVR type	Generator type	AVR type
2. Test of insulation resistance	between phase and ground	2. Test of insulation resistance	between phase and ground	2. Test of insulation resistance	between phase and ground	2. Test of insulation resistance	between phase and ground	2. Test of insulation resistance	between phase and ground
Insulation resistance	20M	Insulation resistance	20M	Insulation resistance	20M	Insulation resistance	20M	Insulation resistance	20M
3. Test of voltage regulation	between phase and ground	3. Test of voltage regulation	between phase and ground	3. Test of voltage regulation	between phase and ground	3. Test of voltage regulation	between phase and ground	3. Test of voltage regulation	between phase and ground
Voltage regulation	5%	Voltage regulation	5%	Voltage regulation	5%	Voltage regulation	5%	Voltage regulation	5%
4. Test of power factor	between phase and ground	4. Test of power factor	between phase and ground	4. Test of power factor	between phase and ground	4. Test of power factor	between phase and ground	4. Test of power factor	between phase and ground
Power factor	0.8	Power factor	0.8	Power factor	0.8	Power factor	0.8	Power factor	0.8
5. Test of frequency	between phase and ground	5. Test of frequency	between phase and ground	5. Test of frequency	between phase and ground	5. Test of frequency	between phase and ground	5. Test of frequency	between phase and ground
Frequency	50Hz	Frequency	50Hz	Frequency	50Hz	Frequency	50Hz	Frequency	50Hz
6. Test of voltage fluctuation	between phase and ground	6. Test of voltage fluctuation	between phase and ground	6. Test of voltage fluctuation	between phase and ground	6. Test of voltage fluctuation	between phase and ground	6. Test of voltage fluctuation	between phase and ground
Voltage fluctuation	0.5%	Voltage fluctuation	0.5%	Voltage fluctuation	0.5%	Voltage fluctuation	0.5%	Voltage fluctuation	0.5%
7. Test of current fluctuation	between phase and ground	7. Test of current fluctuation	between phase and ground	7. Test of current fluctuation	between phase and ground	7. Test of current fluctuation	between phase and ground	7. Test of current fluctuation	between phase and ground
Current fluctuation	0.5%	Current fluctuation	0.5%	Current fluctuation	0.5%	Current fluctuation	0.5%	Current fluctuation	0.5%
8. Test of voltage recovery time	between phase and ground	8. Test of voltage recovery time	between phase and ground	8. Test of voltage recovery time	between phase and ground	8. Test of voltage recovery time	between phase and ground	8. Test of voltage recovery time	between phase and ground
Voltage recovery time	0.5s	Voltage recovery time	0.5s	Voltage recovery time	0.5s	Voltage recovery time	0.5s	Voltage recovery time	0.5s
9. Test of current recovery time	between phase and ground	9. Test of current recovery time	between phase and ground	9. Test of current recovery time	between phase and ground	9. Test of current recovery time	between phase and ground	9. Test of current recovery time	between phase and ground
Current recovery time	0.5s	Current recovery time	0.5s	Current recovery time	0.5s	Current recovery time	0.5s	Current recovery time	0.5s
10. Test of voltage waveform	between phase and ground	10. Test of voltage waveform	between phase and ground	10. Test of voltage waveform	between phase and ground	10. Test of voltage waveform	between phase and ground	10. Test of voltage waveform	between phase and ground
Voltage waveform	0.5%	Voltage waveform	0.5%	Voltage waveform	0.5%	Voltage waveform	0.5%	Voltage waveform	0.5%
11. Test of current waveform	between phase and ground	11. Test of current waveform	between phase and ground	11. Test of current waveform	between phase and ground	11. Test of current waveform	between phase and ground	11. Test of current waveform	between phase and ground
Current waveform	0.5%	Current waveform	0.5%	Current waveform	0.5%	Current waveform	0.5%	Current waveform	0.5%

FREQUENCY AND VOLTAGE CURVES

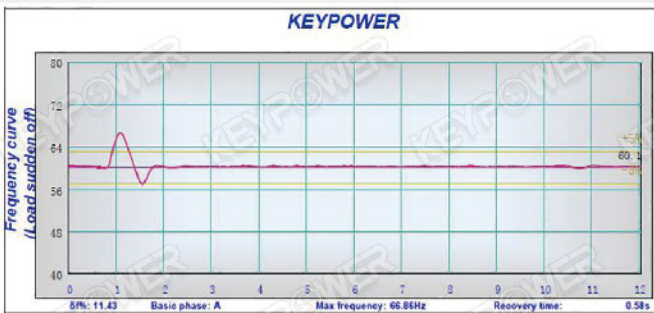


HARMONIC CURVE

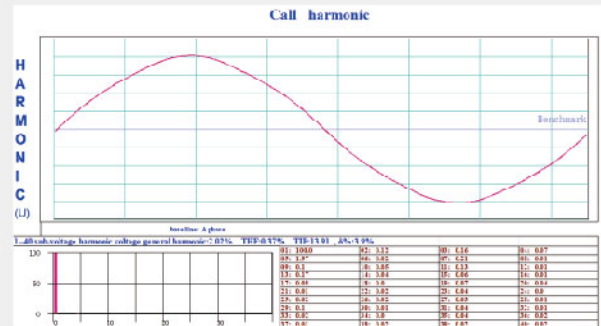

This generator tester can measure most electric parameters of a single-phase or three-phase AC generator. The standards it complied with are GB/T 2820-1997 and GB 2820-90. The signal frequency can be measured varies from 45 Hz to 65Hz. You can select one wiring mode from four modes – 1 Φ 2W, 3 Φ 3W, 3 Φ 4W and 3V/3A. The following table shows the parameters: It's the best way to replicate, prove and verify the real-life demands on critical power systems.

MEASUREMENT MODE	PARAMETERS
Normal	Voltage, Current, Active Power, Reactive Power, Apparent Power, Power Factor, Frequency, Energy runtime, Imbalance degree of Voltage
Harmonic	Voltage & Current: 2~50th order and the THD (Total harmonic distortion)
Adjustment	In 100 seconds: Records the maximum & minimum value of Voltage & Frequency. Calculates the increase & decrease range of Voltage & Frequency and the percentage of adjustment.
Fluctuation	In 60 seconds: Records the maximum & minimum value of Voltage & Frequency. Calculates the NORMAL frequency rang, NORMAL voltage offset, voltage modulation, percentage of fluctuation and frequency.
Load	In 12 seconds: Records the minimum value of Voltage & Frequency. Records the maximum value of Current and the recovery time. Calculates the offset of Voltage & Frequency.
Unload	In 12 seconds: Records the maximum value of Voltage & Frequency. Record the minimum value of Current and the recovery time. Calculates the offset of Voltage & Frequency.
Wave Record	Records the real-time voltage waves by five optional modes. The recording time is between 5 seconds and 5 minutes by different modes.

Control Panel

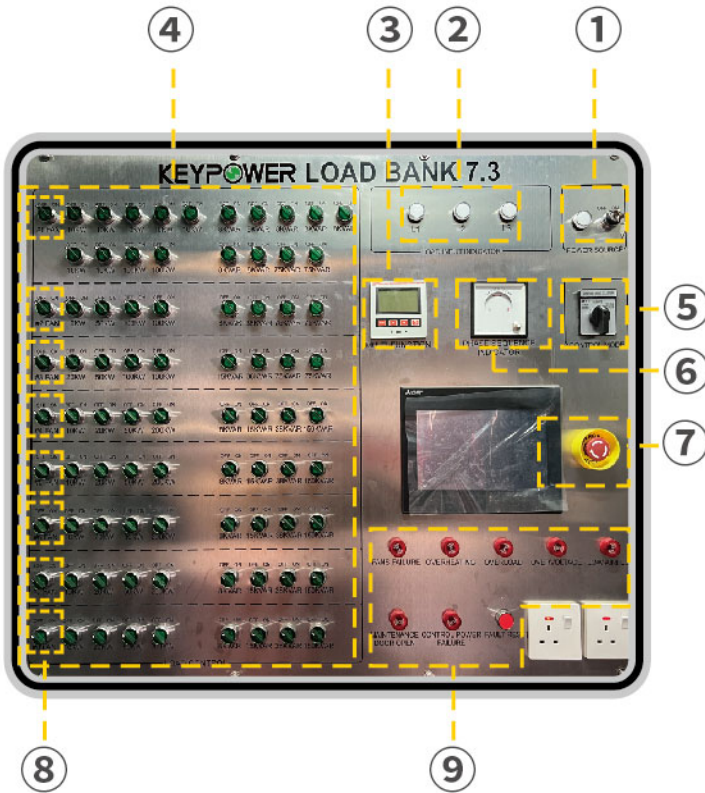


MANUAL CONTROL	FUNCTION
① Turn on / off power source	Tested power source input
② Load input indicator	Indicate U V W load input normal or not
③ Multi-function meter	Show testing parameters
④ Master load on / off	One step loading / unloading
⑤ Control mode selection	Choose control mode: Local manual control / Touch screen control / Remote control
⑥ Phase sequence indicator	Indicate phase sequence of tested power right or not
⑦ Emergency stop button	Emergency stop
⑧ Load Steps	Loading / unloading

⑨ Alarm
Load bank protection: Fan failure alarm / Overload alarm / Overvoltage alarm / Overheating alarm / Low airflow alarm / Maintenance door open alarm / Control power failure

In addition to all manual control functions, Intelligent/remote control also contains the following functions:

- Touch screen control/remote control
- Auto loading/unloading test
- Data setting

Intelligent control system with **Mitsubishi**[®] PLC

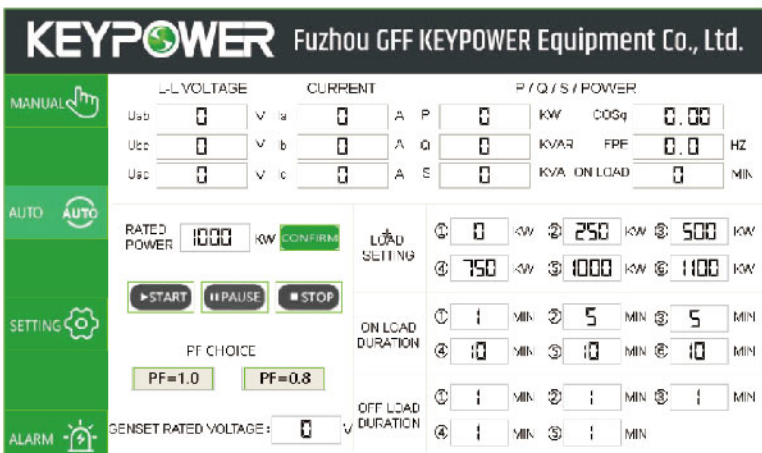

Intelligent Control Interface